

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011
No. LK_2602_KQH_1

1. Unique identification code of the product-type:

KQH-Z 2.1.1.2

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich
Tel: +43-7612/74851-0, Fax DW-11; fural@fural.at, www.fural.com

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

VHT GmbH Institut für Leichtbau Trockenbau Hochbau Darmstadt NB 1503
has performed the initial assessment of the **bearing capacity** according to EN 13964:2014-08 and
has documented it in report No. **PB-598-20 I**.

ITB Institut für Bautechnik NB 1488

has performed the initial assessment of the **flexural strength** according to EN 13964:2014-08 and has documented it
in report No. **LOK-812/C/07-01**.


7. Declared performance

Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A1	
Sound absorption	See folder Test Values Sound Absorption	
Flexural strength	See annex 1	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

Gmunden, 03.02.2026


pp. Dirk Freytag
Authorized Signatory

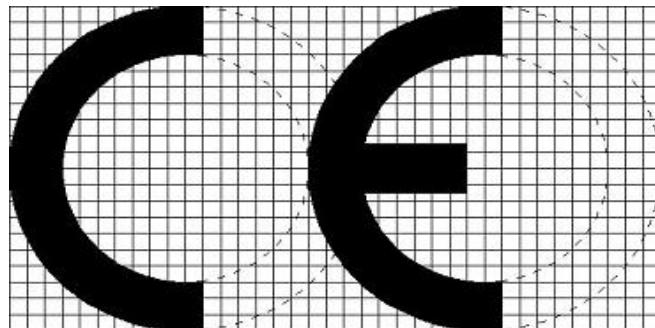

Fural Systeme in Metall GmbH
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

<u>Ceiling system:</u>	KQH-Z	2.1.1.2
Dimensions panel:	max. length [mm]:	625 max. width [mm]: 625
Material panel:	Steel	min. thickness [mm]: 0,5
Perforation:	See folder Test Values Sound Absorption	
Fleece:	Soundtex Typ C 1986 SP or without Fleece	
Reaction to fire:	A1	
Release of asbestos:	no content	
Release of formaldehyde:	E1	
Content other pollutants:	no content	
Flexural strength:	Class 1/A/2N	
Sound absorption:	See folder Test Values Sound Absorption	
Durability:	Class B	

<u>Suspension system:</u>	Nonius hanger with nonius upper part
Variant:	-
Height / dimensions:	100 - 3000 mm
Bearing capacity hanger:	552 N
Bearing capacity suspension key:	KRV C20: 390 N
Bearing capacity system:	lowest value: hanger/ cross connector
Material:	Steel
Reaction to fire:	A1
Content other contaminants:	no content
Durability:	Class B