

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011

No. LK_2607_STM KLH-DZ_BWS_1

1. Unique identification code of the product-type:

STM KLH-DZ 2.2.1.2 BWS

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich

Tel: +43-7612/74851-0, Fax DW-11; fural@fural.at, www.fural.com

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

VHT GmbH Institut für Leichtbau Trockenbau Hochbau Darmstadt NB 1503

has performed the initial assessment of the **bearing capacity** according to EN 13964:2014-08 and

has documented it in report No. **PB-598-20 I.**

Institut für Sportbodentechnik

has performed the initial assessment of the **ball-proof** according to **DIN 18032-3:2018-11** bzw. **EN 13964:2014-08 Anhang D**

and has documented it in report No. **L 7758/MK and L 7759/MK**

PfB GmbH & Co. Prüfzentrum für Bauelemente KG NB 1644

has performed supplementary tests of the **ball-proof** according to **DIN 18032-3:2023-12** and has documented it in report No. **2024-14-0042-K2.**

7. Declared performance


Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A2-s2-d0, (without fleece A1)	EN 13964:2014-08
Sound absorption	See folder Test Values Sound Absorption	
Flexural strength	NPD	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	EN 13964:2014-08 / DIN 18032-3:2018-11 DIN 18032-3:2023-12
Ball-proof	Class 1A/ category D1	

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

Gmunden, 24.07.2026



ppa. Dirk Freitag
Authorized Signatory

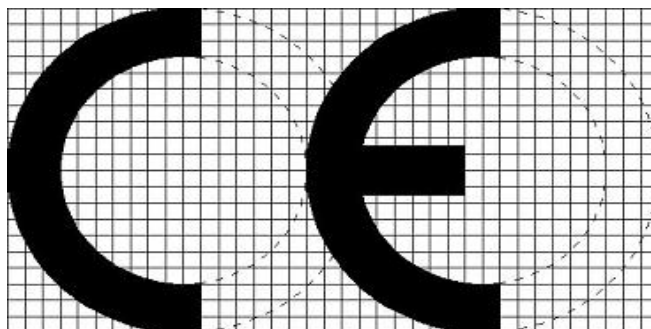

Fural Systeme in Metall GmbH
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

Ceiling system:	STM KLH-DZ 2.2.1.2 BWS		
Dimensions panel:	max. length [mm]:	3000	max. width [mm]: 1230
Material panel:	Steel	min. thickness [mm]:	0,6
Perforation:	See folder Test Values Sound Absorption		
Fleece:	Soundtex Typ C 1986 SP or without fleece		
Reaction to fire:	A2-s2, d0, (without Fleece: A1)		
Release of asbestos:	no content		
Release of formaldehyde:	E1		
Content other pollutants:	no content		
Flexural strength:	Class 1/B/-		
Sound absorption:	See folder Test Values Sound Absorption		
Durability:	Class B		
<u>Suspension system:</u>	Nonius hanger with Nonius upper part		
Variant:	-		
Height / dimensions:	300 - 3000 mm		
Bearing capacity hanger:	Nonius hanger with Nonius upper part: 552 N		
Bearing capacity suspension key:	KRV DZ on C20: 760 N		
Bearing capacity system:	lowest value: hanger/ cross connector		
Material:	Steel		
Reaction to fire:	A1		
Content other contaminants:	no content		
Durability:	Class B		