

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011 No. LK_2503_VS_1

1		Iniauc	idon	tification	codo	of tha	product-type:	
- 1	\cdot	nnaut	: luell	uncauon	COUR	or trie	DI OUUCL-IVDE:	

Curtain Rail

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich Tel: +43-7612/74851-0, Fax DW-11; fural@fural.at, www.fural.com

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

ITB Institut für Bautechnik NB 1488

has performed the initial assessment of the **bearing capacity** and **flexural strengh** and has documented it in report No. LOK-812/C/07-01.


7. Declared performance

Essential characteristics	Declared performance	Harmonised technical specification	
Reaction to fire	A1		
Other hazardous substances	No content	EN 13964:2014-08	
Durability	В		
Bearing capacity	See annex 1		

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

Gmunden, 10.03.2025

ppa. Dirk Freytag Authorized Signatory

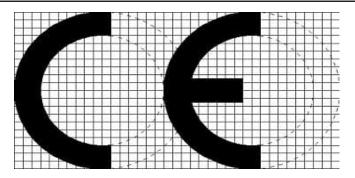

FURAL Systeme in Metall GmbH Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

System: Curtain rail
Material: Aluminium

Suspension: 2 way curtain rail

Variant: Distance between suspension elements 1000mm

Height / dimensions: 35 - 170mm

Bearing capacity hanger: $$119\,\mathrm{N}$$ Bearing capacity suspension key: $$\mathrm{N}$$

Bearing capacity system: 119N per hanger

Reaction to fire: A1

Content other contaminants:no contentDurability:Class B