

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011
No. LK_2503_STM KQE T24_1

1. Unique identification code of the product-type:

STM KQE T24 3.1.0.1

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

**Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich
Tel: +43-7612/74851-0, Fax DW-11; fural@fural.at, www.fural.com**

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

ITB Institut für Bautechnik NB 1488

has performed the initial assessment of the **bearing capacity** and has documented it in report No. **LOK-812/C/07-01**.


7. Declared performance

Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A2-s2,d0, (without fleece A1)	EN 13964:2014-08
Sound absorption	See folder Test Values Sound Absorption	
Flexural strength	NPD	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

ppa. Dirk Freytag
Authorized Signatory

Gmunden, 10.03.2025

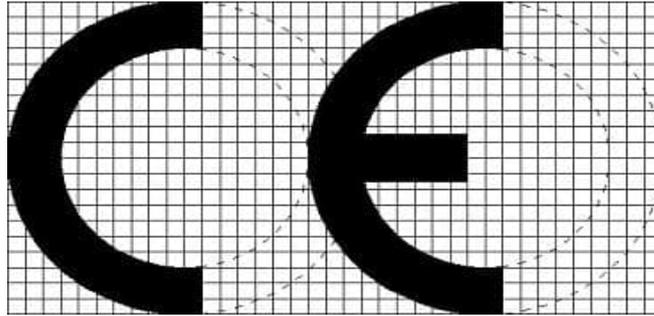

FURAL Systeme in Metall GmbH
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

STM KQE T24 3.1.0.1

Ceiling system:

Dimensions panel:	max. length [mm]:	625	max. width [mm]:	625
Material panel:	Steel		min. thickness [mm]:	0,6
Perforation:	See folder Test Values Sound Absorption			
Fleece:	Soundtex Typ C 1986 SP or without fleece			
Reaction to fire:	A2-s2, d0, (without Fleece: A1)			
Release of asbestos:	no content			
Release of formaldehyde:	E1			
Content other pollutants:	no content			
Flexural strength:	NPD			
Sound absorption:	See folder Test Values Sound Absorption			
Durability:	Class B			

Suspension system:

Suspension wire

Variant:	-
Height / dimensions:	200 - 3000 mm
	Suspension wire: 800 N
Bearing capacity hanger:	
Bearing capacity suspension key:	-
Bearing capacity system:	Suspension wire: 800 N
Material:	Steel
Reaction to fire:	A1
Content other contaminants:	no content
Durability:	Class B