

# DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011

No. LK\_2503\_STM KLE\_1

1. Unique identification code of the product-type:

**STM KLE 3.2.2.3**

2. Intended use:

**Suspended ceiling kits for use internally in buildings**

3. Manufacturer:

**Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich**

**Tel: +43-7612/74851-0, Fax DW-11; fural@fural.at, www.fural.com**

5. System or systems of assessment and verification of constancy of performance:

**System 3**

6. a) Harmonised standard:

**EN 13964:2014-08**

Notified place(s):

**ITB Institut für Bautechnik NB 1488**

has performed the initial assessment of the **bearing capacity** and has documented it in report No. **LOK-812/C/07-01**.

7. Declared performance


Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A2-s2,d0, (without fleece A1)	EN 13964:2014-08
Sound absorption	See folder Test Values Sound Absorption	
Flexural strength	NPD	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:



Gmunden, 10.03.2025

ppa. Dirk Freytag  
Authorized Signatory

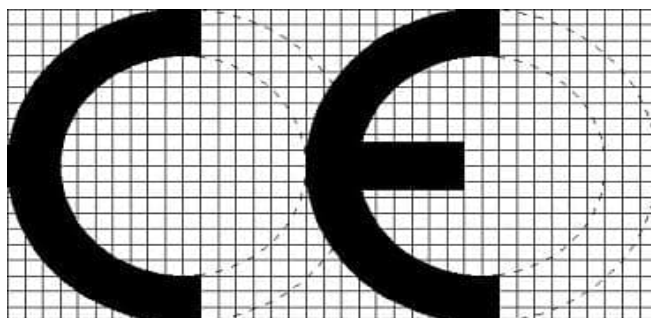

FURAL Systeme in Metall GmbH  
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

# Suspended ceiling kits for use internally in buildings

<b>Ceiling system:</b>	<b>STM KLE</b>	<b>3.2.2.3</b>		
<b>Dimensions panel:</b>	max. length [mm]:	2500	max. width [mm]:	625
<b>Material panel:</b>	Steel		min. thickness [mm]:	0,6
<b>Perforation:</b>	See folder Test Values Sound Absorption			
<b>Fleece:</b>	Soundtex Typ C 1986 SP or without fleece			
<b>Reaction to fire:</b>	A2-s2, d0, (without Fleece: A1)			
<b>Release of asbestos:</b>	no content			
<b>Release of formaldehyde:</b>	E1			
<b>Content other pollutants:</b>	no content			
<b>Flexural strength:</b>	NPD			
<b>Sound absorption:</b>	See folder Test Values Sound Absorption			
<b>Durability:</b>	Class B			
<b>Suspension system:</b>	<b>support on (ALU)trimming profile</b>			
<b>Variant:</b>				
<b>Height / dimensions:</b>				
<b>Bearing capacity hanger:</b>				
<b>Bearing capacity suspension key:</b>				
<b>Bearing capacity system:</b>				
<b>Material:</b>	Steel or Aluminium			
<b>Reaction to fire:</b>	A1			
<b>Content other contaminants:</b>	no content			
<b>Durability:</b>	Class B			