

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011
No. LK_2608_PLC

1. Unique identification code of the product-type:

PLC 6.2.1.X

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

**Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich
Tel: +43-7612/74851-0; fural@fural.at, www.fural.com**

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

VHT GmbH Institut für Leichtbau Trockenbau Hochbau Darmstadt NB 1503
has performed the initial assessment of the **bearing capacity** according to EN 13964:2014-08 and
has documented it in report No. **PB-598-20 I**


7. Declared performance

Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A1	EN 13964:2014-08
Flexural strength	NPD	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

Gmunden, 13.08.2026


ppa. Dirk Freytag
Authorized Signatory

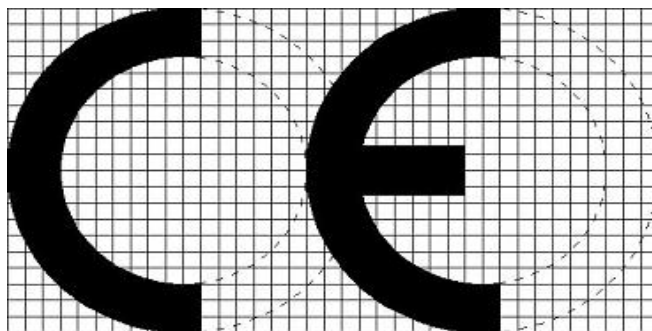

Fural Systeme in Metall GmbH
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

Ceiling system: PLC 6.2.1.X

Dimensions Baffel:	max. length [mm]:	3000	max. width [mm]:	30
Material Baffel:	Aluminium		thickness [mm]:	1,2
Reaction to fire:	A1			
Release of asbestos:	no content			
Release of formaldehyde:	E1			
Content other pollutants:	no content			
Flexural strength:	Class 3/A/2 N			
Durability:	Class B			

Suspension system:	Nonius hanger with 4 mm eyelet wire or
Variant:	-
Height / dimensions:	> 250 mm
Bearing capacity hanger:	Nonius hanger with 4 mm eyelet wire: 719 N (PLC 6.2.1.1) Nonius hanger with Nonius upper part: 552 N (PLC 6.2.1.2) Threaded rod M6 with C20-clamping bracket: 408 N (PLC 6.2.1.5)
Bearing capacity suspension key:	KRV DZ on C20: 760 N
Bearing capacity system:	lowest value: hanger/cross connector
Material:	Steel
Reaction to fire:	A1
Content other contaminants:	no content
Durability:	Class B