

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011

No. LK_2608_KLGG-DZ_BWS_1

1. Unique identification code of the product-type:

KLGG-DZ 2.2.1.2 BWS

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich

Tel: +43-7612/74851-0; fural@fural.at, www.fural.com

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

VHT GmbH Institut für Leichtbau Trockenbau Hochbau Darmstadt NB 1503

has performed the initial assessment of the **bearing capacity** according to EN 13964:2014-08 and

has documented it in report No. **PB-598-20 I**

PfB GmbH & Co. Prüfbüro für Bauelemente KG NB 1644

has performed the initial assessment tests of the **ball-proof** according to DIN 18032-3:2023-12 and has documented it

in report No. **2026-14-0132-K1**

7. Declared performance


Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A1	EN 13964:2014-08
Sound absorption	See folder Test Values Sound Absorption	
Flexural strength	See annex 1	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	
Ball-proof	Class 1A/ category D1	EN 13964:2014-08 / DIN 18032-3:2023-12

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

Gmunden, 13.08.2026



ppa. Dirk Freytag
Authorized Signatory

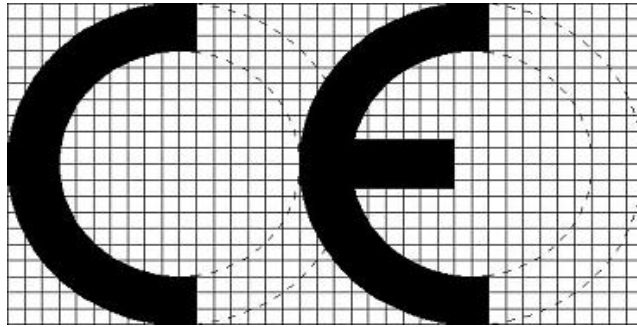

Fural Systeme in Metall GmbH
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

Ceiling system:	KLGG-DZ 2.2.1.2 BWS		
Dimensions panel:	max. length [mm]:	1000 - 3000	max. width [mm]: 500 - 1200
Material panel:	Steel	min. thickness [mm]:	0,8
Perforation:	See folder Test Values Sound Absorption		
Fleece:	Soundtex Typ C 1986 SP or without fleece		
Reaction to fire:	A1		
Release of asbestos:	no content		
Release of formaldehyde:	E1		
Content other pollutants:	no content		
Flexural strength:	Class 1/B/2 N		
Sound absorption:	See folder Test Values Sound Absorption		
Durability:	Class B		
Suspension system:	Nonius hanger with Nonius upper part		
Variant:	-		
Height / dimensions:	> 250 mm		
Bearing capacity hanger:	Nonius hanger with Nonius upper part: 552 N		
Bearing capacity suspension key:	KRV DZ on C20: 760 N KRV HT/Z: 390 N (for wall connection with Z-hang-in-rail)		
Bearing capacity system:	lowest value: hanger/ cross connector		
Material:	Steel		
Reaction to fire:	A1		
Content other contaminants:	no content		
Durability:	Class B		