


	<b>Fural</b>
	Qg 4,0-33 %
Perforation $\square$	4,0 mm
Share of holes	33 %
Max. perforation exterior size	630 mm
Max. tool width roll size	800 mm
Max. material thickness steel	0,70 mm
Max. material thickness alu	0,60 mm
DIN 24041 Designation	Qg 4,00-7,00
Distance horizontal	7,00 mm →
Distance vertical	7,00 mm ↓
Distance diagonal	9,89 mm ↘
Direction of perforation:	→

**Sound absorption**

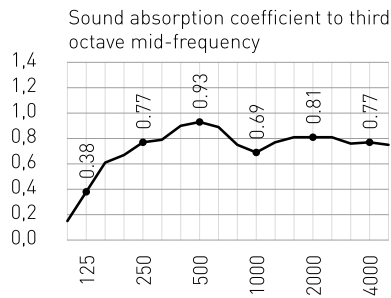

Frequency	Third value	Octave value
100	0,15	
125	0,38	0,40
160	0,61	
200	0,67	
250	0,77	0,75
315	0,79	
400	0,90	
500	0,93	0,90
630	0,89	
800	0,75	
1000	0,69	0,75
1250	0,77	
1600	0,81	
2000	0,81	0,80
2500	0,81	
3150	0,76	
4000	0,77	0,75
5000	0,75	

Air gap	200 mm
Acoustic fleece	Acoustic-Fleece, glued in
Test certificate	P-BA 279/2006 Bild 4
NRC	0,80
a <sub>w</sub>	0,80
Absorber class	B (DIN EN 11654)
Support	without