


**Fural**  
 Rg 0,7-4%  
 Perforation  $\varnothing$  0,7 mm  
 Share of holes 4 %  
 Max. perforation exterior size 1.197 mm  
 Max. tool width roll size 1.250 mm  
 Max. material thickness steel 0,70 mm  
 Max. material thickness alu -  
 DIN 24041 Designation Rg 0,70-3,00  
 Distance horizontal 3,00 mm  $\rightarrow$   
 Distance vertical 3,00 mm  $\downarrow$   
 Distance diagonal 4,24 mm  $\searrow$   
 Direction of perforation:  $\rightarrow$

**Sound absorption**

Sound absorption coefficient to third octave mid-frequency

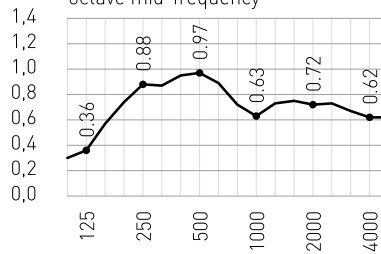

Frequency	Third value	Octave value
100	0,30	
125	0,36	0,40
160	0,57	
200	0,74	
250	0,88	0,85
315	0,87	
400	0,95	
500	0,97	0,95
630	0,89	
800	0,72	
1000	0,63	0,70
1250	0,73	
1600	0,75	
2000	0,72	0,75
2500	0,73	
3150	0,67	
4000	0,62	0,65
5000	0,62	

Air gap 200 mm  
 Acoustic fleece Acoustic-Fleece, glued in  
 Test certificate P-BA 219/2007  
 NRC 0,80  
 a<sub>w</sub> 0,75 (LM)  
 Absorber class C (DIN EN 11654)  
 Support without