


Fural
Rv 1,6-20%

Perforation \varnothing 1,6 mm
Share of holes 20 %
Max. perforation exterior size 1.450 mm
Max. tool width roll size 1.500 mm
Max. material thickness steel 0,70 mm
Max. material thickness alu -
DIN 24041 Designation Rv 1,60-3,50
Distance horizontal 3,50 mm \rightarrow
Distance vertical 3,03 mm \downarrow
Offset spacing 60° 3,50 mm \searrow
Direction of perforation: \rightarrow

Sound absorption

Sound absorption coefficient to third octave mid-frequency

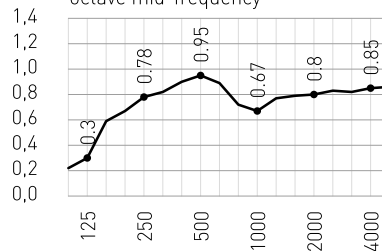

Frequency
Third value
Octave value

Air gap 200 mm
Acoustic fleece Acoustic-Fleece, glued in
Test certificate P-BA 279/2006 Bild 2
NRC 0,74
 a_w 0,80
Absorber class B (DIN EN 11654)
Support without

f(Hz)	a_s	a_p
100	0,22	
125	0,30	0,35
160	0,59	
200	0,67	
250	0,78	0,75
315	0,82	
400	0,90	
500	0,95	0,90
630	0,89	
800	0,72	
1000	0,67	0,70
1250	0,77	
1600	0,79	
2000	0,80	0,80
2500	0,83	
3150	0,82	
4000	0,85	0,85
5000	0,86	