


Fural
 Rg 4,0-17%
 Perforation \varnothing 4,0 mm
 Share of holes 17 %
 Max. perforation exterior size 1.453 mm
 Max. tool width roll size 1.500 mm
 Max. material thickness steel 0,70 mm
 Max. material thickness alu 1,00 mm
 DIN 24041 Designation Rg 4,00-8,60
 Distance horizontal 8,60 mm \rightarrow
 Distance vertical 8,60 mm \downarrow
 Distance diagonal 12,10 mm \searrow
 Direction of perforation: \rightarrow

Sound absorption

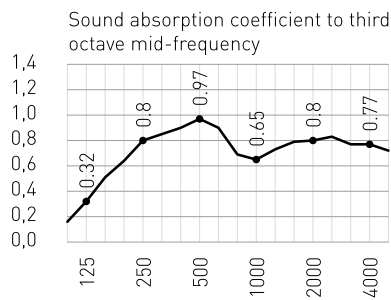

Frequency	Third value	Octave value
100	0,16	
125	0,32	0,35
160	0,51	
200	0,64	
250	0,80	0,75
315	0,85	
400	0,90	
500	0,97	0,90
630	0,90	
800	0,69	
1000	0,65	0,70
1250	0,73	
1600	0,79	
2000	0,80	0,80
2500	0,83	
3150	0,77	
4000	0,77	0,75
5000	0,72	

Air gap 200 mm
 Acoustic fleece Acoustic-Fleece, glued in
 Test certificate P-BA 279/2006 Bild 7
 NRC 0,80
 α_w 0,80
 Absorber class B (DIN EN 11654)
 Support without