



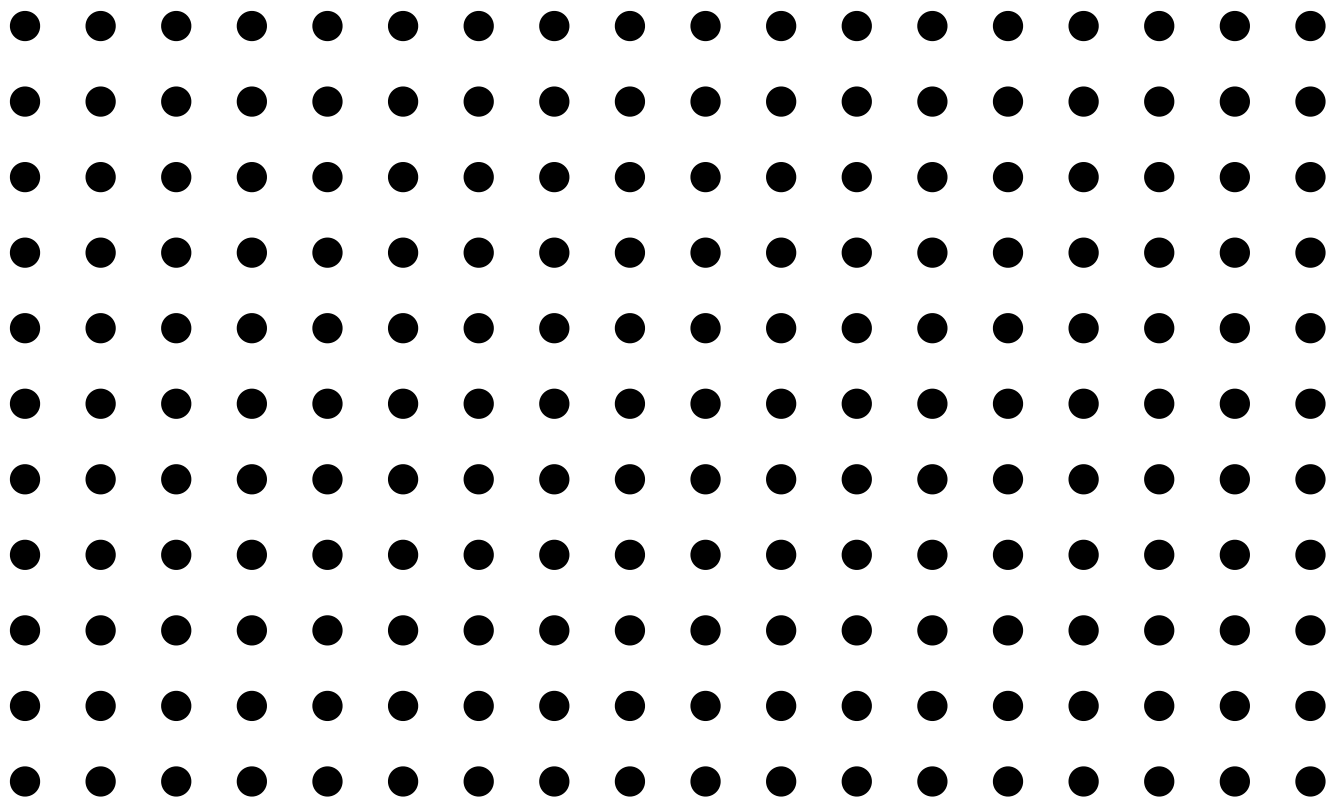

	Fural
	Rg 4,0-12%
Perforation $\varnothing$	4,0 mm
Share of holes	12 %
Max. perforation exterior size	680 mm
Max. tool width roll size	750 mm
Max. material thickness steel	0,70 mm
Max. material thickness alu	1,00 mm
DIN 24041 Designation	Rg 4,00-10,00
Distance horizontal	10,00 mm →
Distance vertical	10,00 mm ↓
Distance diagonal	14,14 mm ↘
Direction of perforation:	→

Sound absorption

Sound absorption coefficient to third octave mid-frequency

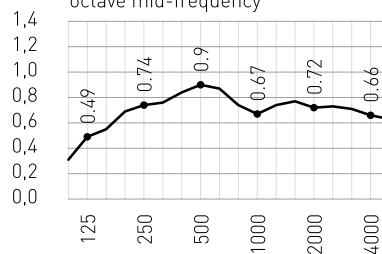

Air gap	200 mm
Acoustic fleece	Acoustic-Fleece, glued in
Test certificate	M 105629/48
NRC	0,75
a _w	0,75
Absorber class	C (DIN EN 11654)
Support	without

Frequency	Third value	Octave value
f(Hz)	a _s	a _p
100	0,31	
125	0,49	0,45
160	0,55	
200	0,69	
250	0,74	0,75
315	0,76	
400	0,84	
500	0,90	0,85
630	0,87	
800	0,74	
1000	0,67	0,70
1250	0,74	
1600	0,77	
2000	0,72	0,75
2500	0,73	
3150	0,71	
4000	0,66	0,65
5000	0,63	