


**Fural**  
 Rd 4,0-6%  
 Perforation  $\varnothing$  4,0 mm  
 Share of holes 6 %  
 Max. perforation exterior size 680 mm  
 Max. tool width roll size 750 mm  
 Max. material thickness steel 0,70 mm  
 Max. material thickness alu 1,00 mm  
 DIN 24041 Designation Rd 4,00-14,14  
 Distance horizontal 20,00 mm  $\rightarrow$   
 Distance vertical 10,00 mm  $\downarrow$   
 Distance diagonal 14,14 mm  $\searrow$   
 Direction of perforation:  $\rightarrow$

**Sound absorption**

Sound absorption coefficient to third octave mid-frequency

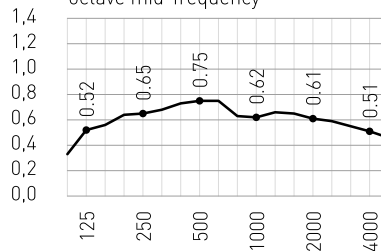

Air gap 200 mm  
 Acoustic fleece Acoustic-Fleece, glued in  
 Test certificate M 105629/46  
 NRC 0,65  
 $\alpha_w$  0,65  
 Absorber class C (DIN EN 11654)  
 Support without

Frequency	Third value	Octave value
100	0,33	
125	0,52	0,45
160	0,56	
200	0,64	
250	0,65	0,65
315	0,68	
400	0,73	
500	0,75	0,75
630	0,75	
800	0,63	
1000	0,62	0,65
1250	0,66	
1600	0,65	
2000	0,61	0,60
2500	0,59	
3150	0,55	
4000	0,51	0,50
5000	0,46	