

DECLARATION OF PERFORMANCE

According to annex III of the regulation (EU) No. 305/2011
No. LK_2602_KLK_2

1. Unique identification code of the product-type:

KLK 1.2.0.2 BWS

2. Intended use:

Suspended ceiling kits for use internally in buildings

3. Manufacturer:

**Fural Systeme in Metall GmbH; Cumberlandstraße 66; A-4810 Österreich
Tel: +43-7612/74851-0, Fax DW-11; fural@fural.at, www.fural.com**

5. System or systems of assessment and verification of constancy of performance:

System 3

6. a) Harmonised standard:

EN 13964:2014-08

Notified place(s):

ITB Institut für Bautechnik NB 1488

has performed the initial assessment of the **bearing capacity** and has documented it
in report No. **LOK-812/C/07-01**.

MFPA Leipzig GmbH NB 0800

has performed the initial assessment of the **ball-proof** and has documented it
in report No. **S2.1/11-186-1**.

PfB GmbH & Co. Prüfzentrum für Bauelemente KG

has performed supplementary tests of the **ball-proof according to DIN 18032-3:2023-12** and has documented it
in report No. **2024-14-0042-K2**.

7. Declared performance


Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire	A1	EN 13964:2014-08
Sound absorption	See folder Test Values Sound Absorption	
Flexural strength	See annex 1	
Asbestos	No content	
Formaldehyde	E1	
Other hazardous substances	No content	
Durability	B	
Bearing capacity	See annex 1	
Ball-proof	Class 1 Category D1	EN 13964:2014-08 DIN 18032-3:2023-12

The performance of the above product is in conformity with the declared performances. The manufacturer named above is solely responsible for drawing up the declaration of performance in accordance with Regulation (EU) No. 305/2001. Signed for and on behalf of the manufacturer by:

Gmunden, 26.02.2026



ppa. Dirk Freytag
Authorized Signatory

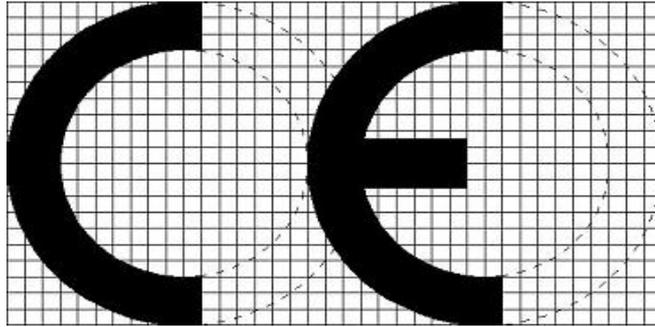

Fural Systeme in Metall GmbH
Cumberlandstraße 66, A-4810 Österreich

EN 13964:2014-08

Suspended ceiling kits for use internally in buildings

Ceiling system:	KLK	1.2.0.2 BWS	
Dimensions panel:	max. length [mm]:	3000	max. width [mm]: 625
Material panel:	Steel		min. thickness [mm]: 0,7
Perforation:	See folder Test Values Sound Absorption		
Fleece:	Soundtex Typ C 1986 SP or without fleece		
Reaction to fire:	A1		
Release of asbestos:	No content		
Release of formaldehyde:	E1		
Content other pollutants:	No content		
Flexural strength:	Class 1/B/2N		
Sound absorption:	See folder Test Values Sound Absorption		
Durability:	Class B		

Suspension system:	Nonius or univ. clip angle
Variant:	with and without grid profile
Height / dimensions:	300 - 3.000 mm
Bearing capacity hanger:	Nonius: 390 N
Bearing capacity suspension key:	500 N
Bearing capacity system:	lowest value: hanger/ cross connector
Material:	Steel
Reaction to fire:	A1
Content other contaminants:	No content
Durability:	Class B